



TECHNICAL BULLETIN

Argus

FK 76M

FCD ARENTB0001



Ball Valve FK 76M:

Designed to meet API-6D / ASME B16.34 / PED 97/23/EC requirements, the FK76M ball valve represents the highest standards in valve technology. Innovative design features include a superfine finished trunnion mounted ball, low operating torques and an extended service life.

Sizes:

| | | |
|------------------------|------------------|-----------------|
| ASME Pressure Classes: | DN 2 ½" – DN 36" | Class 150 - 900 |
| DIN Pressure Classes: | DN 65 – DN 900 | PN 16 – 160 |

Technical Design Features:

Design to API 6D / ASME B16.34 / PED 97/23/EC.

Materials: ASME Section II; Pressure / Temperature rating: ASME B16.34; Wall thickness: ASME B16.34; face to face dimension: ASME B16.10, Flange connection ASME B16.5

DIN Design and materials according to PED 97/23/EC.

Split body / 3-piece design, trunnion mounted design, full bore, ends ASME B16.5 or EN or EN 1092-1.

- Fire-safe according to BS 6755 Part 2, ISO 10497 or API 607 6th ed.
- Anti-blow out stem, long life double stem seal system and stem supported in bearings to ensure seals are free from operation loads
- Stem sealing system according to TA-Luft VDI 2440, EPA or EN ISO 15848-1:2006
- Face to face dimensions according to EN 558-1, EN 12980 or ASME B16.10
- Anti-static Design according to DIN EN ISO 17292, chapter 5.2.7
- Ball valve certification for "Exida" for Functional safety according to IEC 61598 SIL 3

Materials:

| Description | PED Description | Material Description DIN EN | Nearest theoretical ASTM Material | |
|--------------------------|--------------------|---------------------------------|------------------------------------|------------------------------------|
| Body/Flanges | P355NL1+N | LCS TSTE 355N DIN EN 1.0566 | A350LF2 | |
| | G20Mn5 | LCS Casting DIN EN 1.6220 | A352LCB | |
| | X6CRNiMoTi17-12-2 | SS DIN EN 1.4571 | A182 Gr. F 316 | |
| | GX5CrNiMo19-11-2 | SS DIN EN 1.4408 | A351 Gr. CF8M | |
| | GX2CrNiMoN18 10 | SS DIN EN 1.4404 | A182 GR. F 316L | |
| | GX5CrNiMoNb19-11-2 | SS DIN EN 1.4581 | A351 Gr. CF10C | |
| | P250GH+N | C22.8 (DIN EN) | A105 | |
| | Ball | GX20Cr14 | CR 13 DIN EN 1.4027 | A217 Gr. CA15 |
| X6CrNiMoTi17-12-2 | | SS DIN EN 1.4571 | A182 Gr. F 316 | |
| P355NL1+N + ENP | | LCS TSTE 355N DIN EN 1.0566 ENP | A350LF2 ENP | |
| X2CrNiMoN22-5-3 | | Duplex DIN EN 1.4462 | A182 F51 | |
| GX5CrNiMo19-11-2 | | SS DIN EN 1.4408 | A351 Gr. CF8M | |
| NiCu30FE | | Monel K 400 DIN EN 2.4360 | B564-99 / B164-98 | |
| X2CrNiMoN22-5-3 ENP | | Duplex DIN EN 1.4462 ENP | A182 F51 ENP | |
| X2CrNiMoN22-5-3 CRABIDE | | Duplex DIN EN 1.4462 CRABIDE | A182 F51 CRABIDE | |
| X2CrNiMoN22-5-3 ARGULOY | | Duplex DIN EN 1.4462 ARGULOY | A182 F51 ARGULOY | |
| GX5CrNiMo19-11-2 ENP | | SS DIN EN 1.4408 ENP | A351 Gr. CF8M ENP | |
| GX5CrNiMo19-11-2 CRABIDE | | SS DIN EN 1.4408 CRABIDE | A351 Gr. CF8M CRABIDE | |
| GX5CrNiMo19-11-2 ARGULOY | | SS DIN 1.4408 ARGULOY | A351 Gr. CF8M ARGULOY | |
| Stem | | X2CrNiMoN22-5-3 | Duplex DIN EN 1.4462 | A182 F51 |
| | | X5CrNiCuNB16-4 | 17-4 PH DIN EN 1.4542 | 17-4 PH |
| | | X2CrNiMNMb211653 | Nitronic DIN EN1.3964 | Nitronic 50 |
| | | X5CrNiCuNB16-4 | 17-4 PH (NACE) UNS S17400 Type 630 | 17-4 PH (NACE) UNS S17400 Type 630 |

Materials (...):

| | | | |
|---|-------------------------|---|------------------|
| Stem Seals | | PTFE; FPM, Graphite | |
| Ball seats | | PTFE/ss, POM/ss; LYTON/ss spring loaded, Cavity Relief | |
| | X2CrNiMoN22-5-3 ENP | Duplex DIN EN 1.4462 ENP | A182 F51 ENP |
| | X2CrNiMoN22-5-3 CRABIDE | Duplex DIN EN 1.4462 CRABIDE | A182 F51 CRABIDE |
| | X2CrNiMoN22-5-3 ARGULOY | Duplex DIN EN 1.4462 ARGULOY | A182 F51 ARGULOY |
| Body Seals | | PTFE; FPM, Graphite | |
| Screws | | A193 Gr. B8MN Cl.2; A193 GR. 88mN2 Cl.2B; A4-70; A198 Gr. B7; A198 Gr. B7M; A320 Gr.L7; A320Gr. L/M; 1.4980 | |
| Nuts | | A192 Gr.8M; A4-70; A194 Gr.2HM; A194 Gr. 7M;A194 Gr. 4; 1.4980 | |
| Note: Speccial materials and alloy on requesty; e.g. inconel, Alloy 20, Super Duplex, Monel, Hastelloy or seawater resistant bronze | | | |






Valve Body Design:

(Standard, alternative design on request)




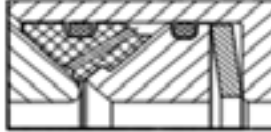
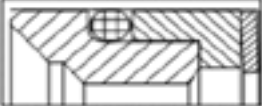

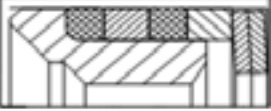
| mm | In | | | | | |
|-------------|----|-------|-----|-----|-----|-----|
| 900 | 36 | | | | | |
| 850 | 34 | | | | | |
| 800 | 32 | | | | | |
| 750 | 30 | | | | | |
| 700 | 28 | | | | | |
| 650 | 65 | | | | | |
| 600 | 24 | | | | | |
| 500 | 20 | | | | | |
| 450 | 18 | | | | | |
| 400 | 16 | | | | | |
| 350 | 14 | | | | | |
| 300 | 12 | | | | | |
| 250 | 10 | | | | | |
| 200 | 8 | | | | | |
| 150 | 6 | | | | | |
| 100 | 4 | | | | | |
| 80 | 3 | | | | | |
| ANSI CLASS: | | 150 | 300 | 400 | 600 | 900 |
| DIN PN: | | 10/16 | 40 | 63 | 100 | 160 |

Soft Seat Materials:





- PTFE:** Polytetrafluorethene; very high chemical resistance, minimized coefficient of friction
- POM:** Polyoxymethylene; high solidity, hardness and rigidity values by high abrasion resistance and low coefficient of friction
- LYTON (PEEK):** Polyetheretherketone; high chemical resistance, higher temperature rating; high solidity in combination with high abrasion resistance

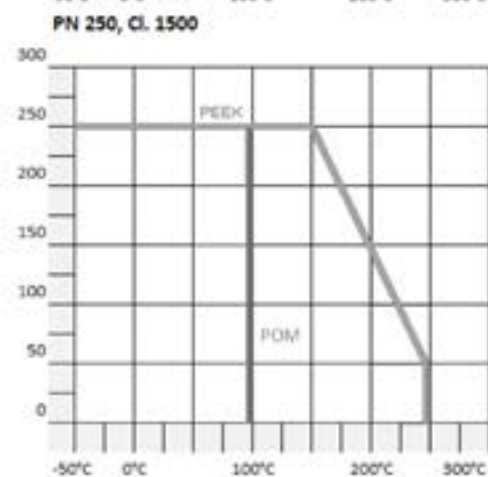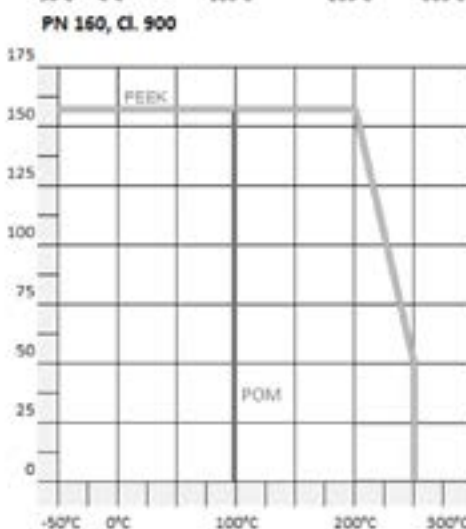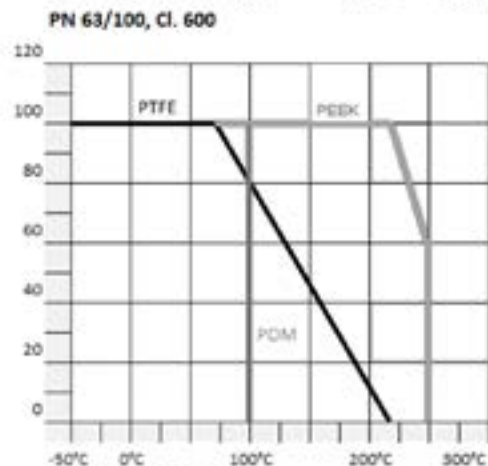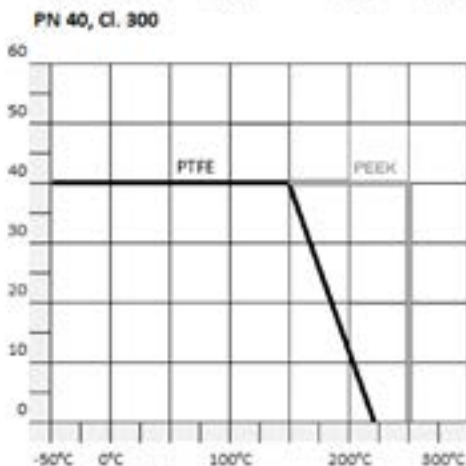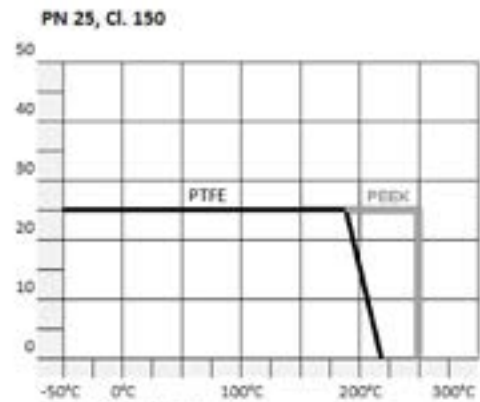

Ball Seat Systems:

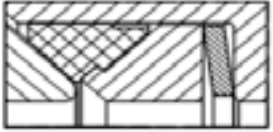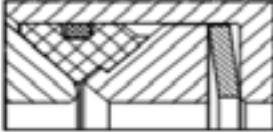
| | | | |
|--|--|--|---|
| <p>PTFE / SS / Duplex</p>  | <p>POM / SS / Duplex</p>  | <p>Lyton (PEEK) / POM / SS / Duplex Chambered version</p>  | <p>POM / SS / Duplex – Secondary - sealing system</p>  |
| <p>Metal seated O-ring Version</p>  | <p>Metal seated Graphite version DN 80-150</p>  | <p>Metal seated Graphite version from DN 200</p>  | <p>Optional: Double Piston, cavity relief</p> <p style="text-align: center;">on request</p> |

Stem Sealing Systems:
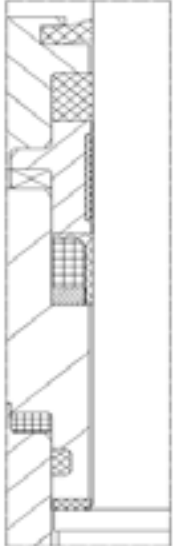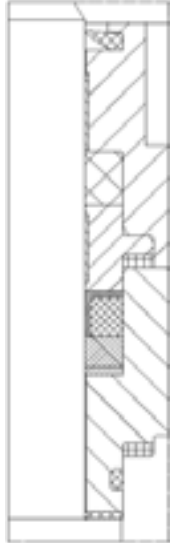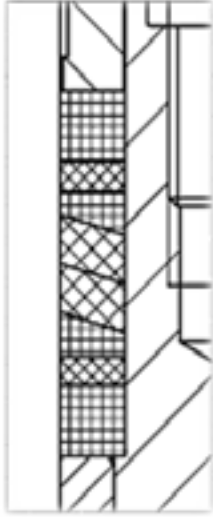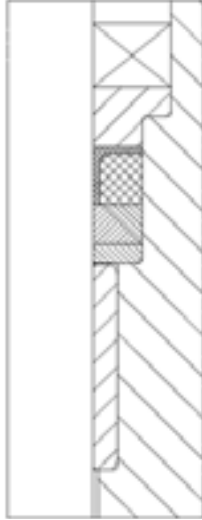
| | | | |
|--|--|---|--|
| <p>PTFE (TA-Luft)/Graphite (Fire-safe)</p>  | <p>PTFE (ISO 15848)/Graphite (Fire-safe)</p>  | <p>Graphite (TA-luft) High temperature</p>  | <p>Graphite (ISO 15848) High temperature</p>  |
|--|--|---|--|


Metal Coatings :

ENP / Nikadur: Electroless nickel coating

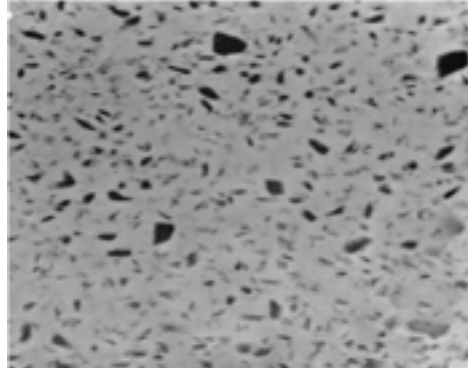


| | |
|------------------------|---|
| Composition: | Nickel + Cr + others |
| Hardness: | > 70 HRC |
| Temperature limit: | + 350°C |
| Thickness: | 50 -80µ |
| Chemical properties: | Corrosion resistance against liquid and gaseous medias as well under high temperature conditions up to +350°C |
| Mechanical properties: | Hard surface and high resistance against corrosion and adhesive wear |

CRABIDE: Crabide is a hard metal alloy based on Chromium-carbide and Nickel/Chromium

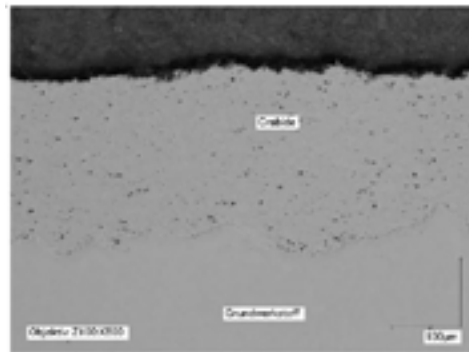

| | |
|------------------------|---|
| Composition: | Cr ₂ C ₃ /Ni-Cr 75/25 |
| Hardness: | 900 – 1100 HV _{0,3} (>67 HRC) |
| Temperature limit: | max. 970° (depending from base material and process conditions) |
| Thickness: | 200 – 300 µm (usual) |
| Chemical properties: | Resistance versus media in the range of pH 5 and pH 12, as well under high temperature conditions |
| Mechanical properties: | High resistance especially against abrasion and adhesive wear and sliding abrasion. |


ARGULOY: ARGULOY is a Nickel based-based hard alloy. It is applied by flame-spraying and a special heat treatment after application ensures intimate bonding to the base material. The applied layers are homogenous, crack free, and resistant to corrosion and wear.

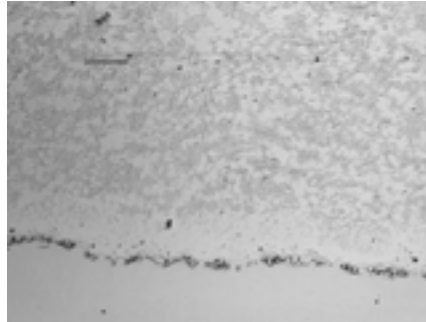

| | |
|------------------------|--|
| Composition: | Ni >70 %, Cr, B, Si |
| Hardness: | 58 – 62 HRC |
| Temperature limit: | max. 750° (depending on base material and process conditions) |
| Thickness: | 500 - 800 µm (usual) |
| Chemical properties: | High corrosion resistance against liquid and gaseous media; chemical base and halogen acids, as well under high temperature conditions. |
| Mechanical properties: | High resistance especially against abrasion and adhesive wear and sliding abrasion. The diffusion zone between coating and base material after sintering is about 50µm. That's why the coating is preserved in case of wear. |

Note: Additional metal coating systems on request

Assembly Drawing: Serial 76M

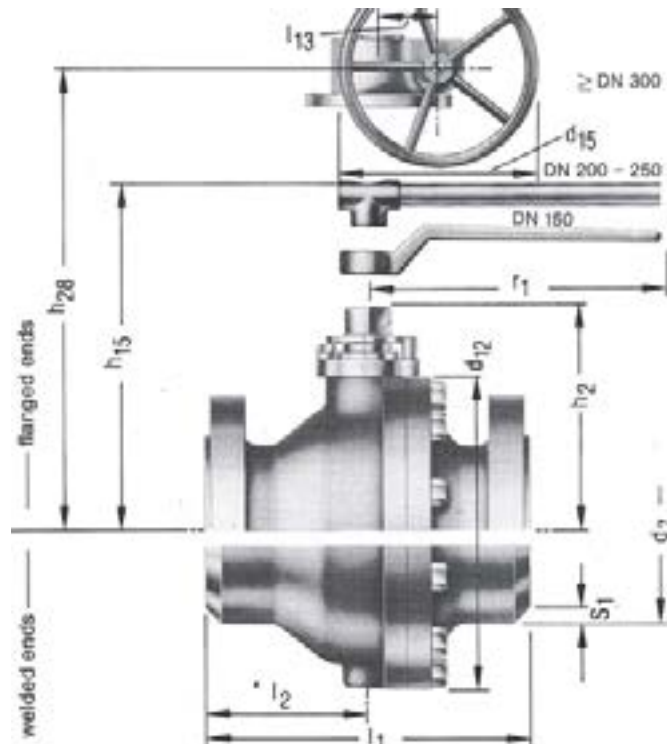

Ball Valves – Full Bore:

Face to face dimensions according to EN 558-1, Connector/flange specifications EN 1092-1, ANSI B16.10 RF or RTJ (Welded ends according to DIN EN 12892 / DIN 3357 T2 on request)

| Diameter Inch/mm | DIN EN 558-1 PN 10/16 | | DIN EN 558-1 PN 25/40 | | DIN EN 558-1 PN 63/100 | ANSI B16.10 | | | | |
|---------------------|--------------------------|------------|--------------------------|------------|------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| | Short mm | Long mm | Short mm | Long mm | Long mm | Class 150 mm/RF | Class 300 mm/RF | Class 600 mm/RF | Class 900 mm/RF | Class 900 mm/RTJ |
| 2.5 65 | 170 | 290 | 170 | 290 | 290 | 190.5 | 241.3 | - | - | - |
| 3 80 | 180 | 310 | 180 | 310 | 310 | 203 | 283 | 356 | 381 | 384 |
| 4 100 | 190 | 350 | 190 | 350 | 350 | 229 | 305 | 432 | 457 | 460 |
| 5 125 | 325 | - | 325 | - | 400 | 325 | 381 | 400 | - | - |
| 6 150 | 350 | - | 350 | - | 450 | 394 | 403 | 55 | 610 | 613 |
| 8 200 | 400 | - | 400 | - | 550 | 457 | 502 | 660 | 737 | 740 |
| 10 250 | *450 | 650 | *450 | 650 | 650 | 533 | 568 | 787 | 838 | 841 |
| 12 300 | *500 | 750 | *500 | 750 | 750 | 610 | 648 | 838 | 965 | 968 |
| 14 350 | - | **650 | 550 | | | 685.4 | 762 | 889 | - | - |
| 16 400 | 762 | - | 762 | - | 950 | 762 | 838.2 | 991 | 1130 | 1140 |
| 18 450 | - | - | - | - | - | - | 914 | - | 1219 | 1232 |
| 20 500 | | **1150 | - | **1150 | - | 914 | 990 | 1194 | 1321 | 1334 |
| 24 600 | - | - | - | - | - | 1067 | 1134 | 1397 | 1549 | 1568 |
| 30 750 | | | | | | | 1397 | 1651 | | |
| 36 900 | | | | | | 1524 | | 2083 | | |

*Ball valve in stainless steel material

**Ball Valves in carbon steel ASTM A 350 Gr. LF2 TSTE 355 DIN 1.0566 / stainless steel casting DIN 1.4408

Ball valves – Reduced Bore:

Face to face dimensions according to ANSI B16.10-2000 RF

| Diameter Inch/mm | | ANSI B16.10 | ANSI B16.10 | ANSI B16.10 |
|------------------|-------------|--------------|--------------|--------------|
| | | Class 150 MM | Class 300 mm | Class 600 mm |
| 6x4x6 | 150x100x150 | 267 | 403 | 558 |
| 8x6x8 | 200x150x150 | *292 | *419 | 660 |
| 10x8x10 | 250x200x250 | *330 | *457 | 787 |
| 12x10x12 | 300x250x300 | 610 | 648 | 838 |
| 14x12x14 | 350x300x350 | 686 | 762 | 889 |
| 16x12x16 | 400x300x400 | 762 | 838 | 991 |
| 18x16x18 | 450x400x450 | 864 | 914 | 1092 |
| 20x16x20 | 500x400x500 | 914 | 900 | 1092 |
| 20x16x20 | 600x500x600 | 1067 | 1143 | 1397 |
| 36x30x36 | 900x750x900 | 1524 | | |

*Ball valve in short pattern

Serial Classification:


| | |
|-----------|--------------------------------|
| FK 76M | DN 80, 100, 150, 200, 250, 300 |
| FK 76 (M) | DN 65, 125, 350, 400 |
| FK 76M | DN 450, 500, 600, 750, 900 |

Design Options:



| Heating jackets, double sided | Wearing bushes (abrasive wear) |
|--|--------------------------------|
| | |
| Seat pocket design: Solids / Fines / Slurry (ball seat area) | |
| | |

Ball valve topwork for automation (Standard):


FK 76M DN 80 + DN 100 DIN ISO 5211 (F10/F12 – drawing F10)

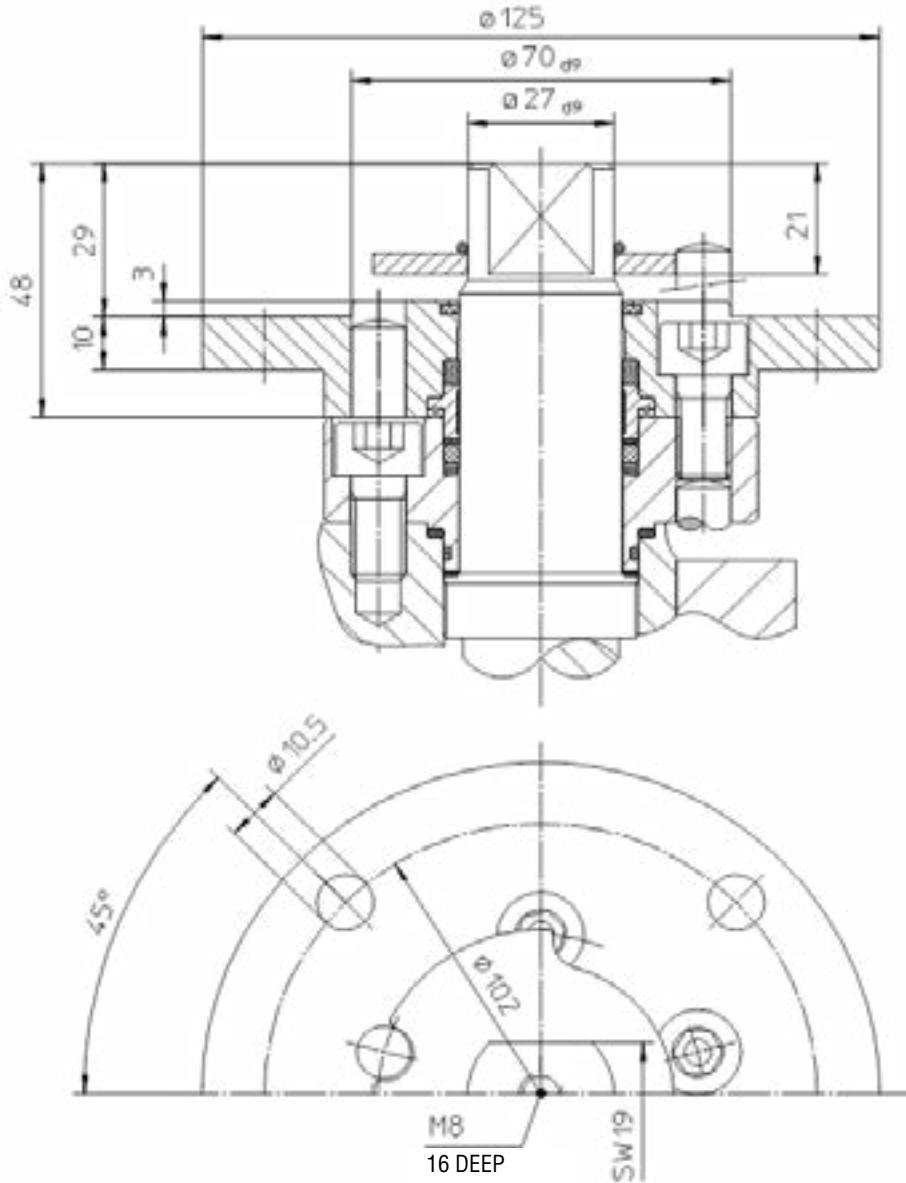



FK 76M DN 80 + DN 100 DIN ISO "419"

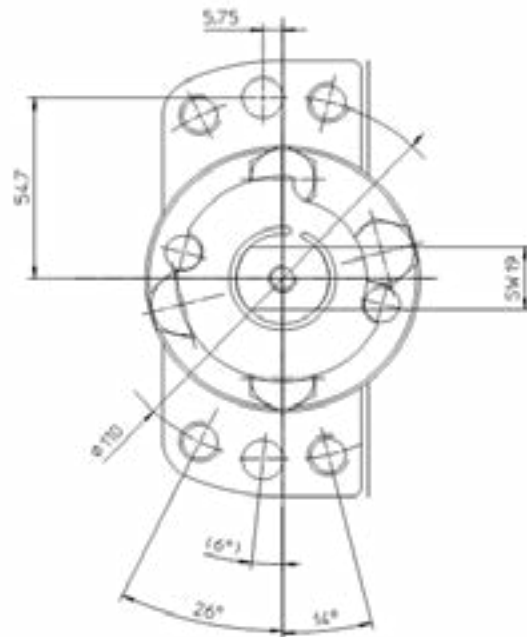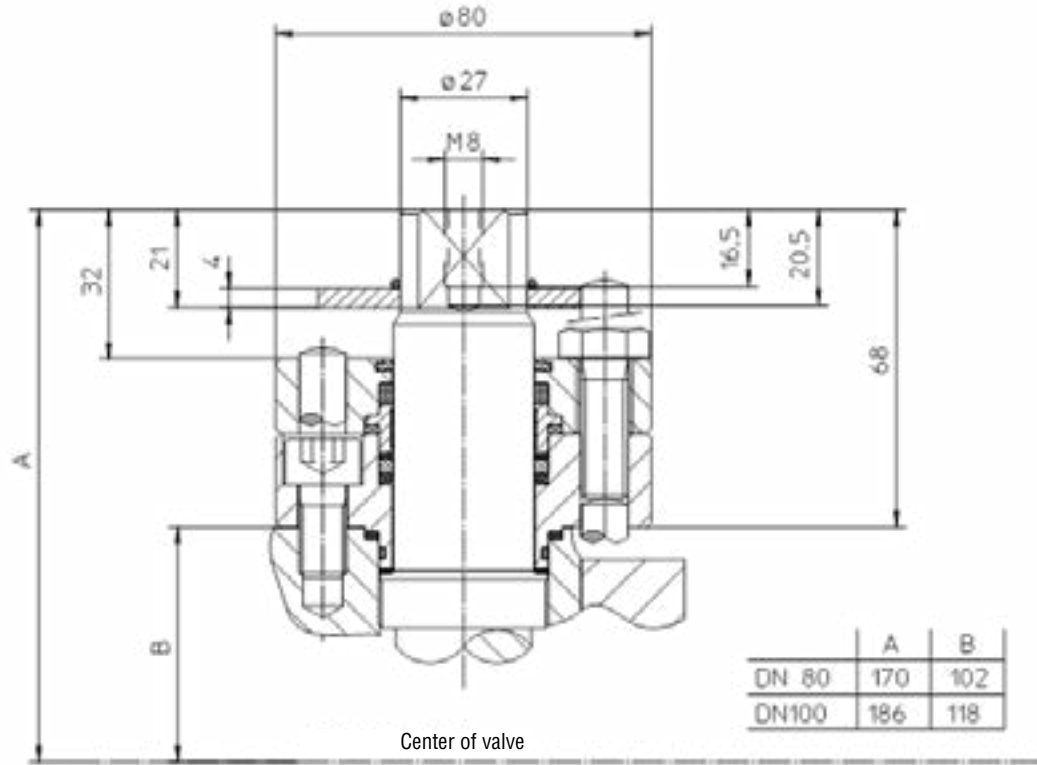



FK 76M DN 80 + DN 100 DIN ISO "419"
High temperature design:

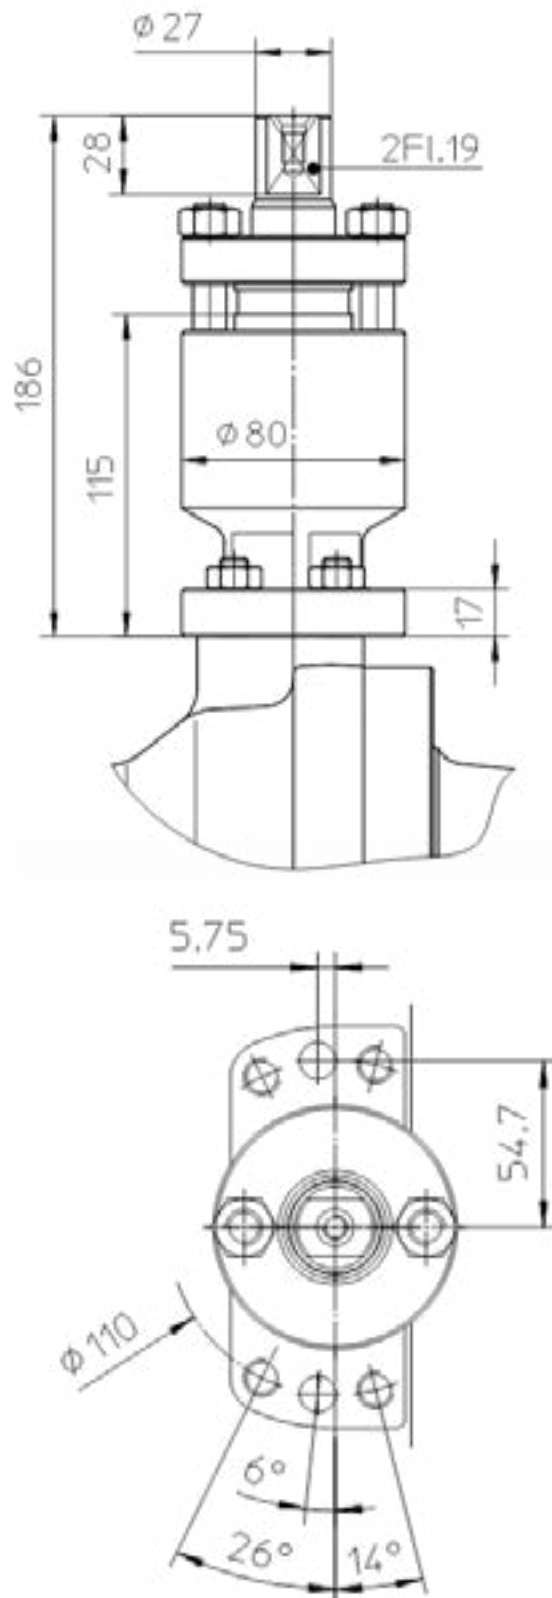



FK 76M DN 150 + DN 200 DIN ISO "419"

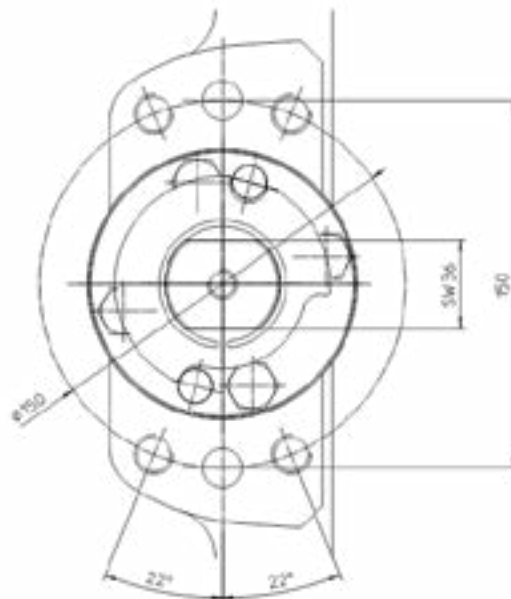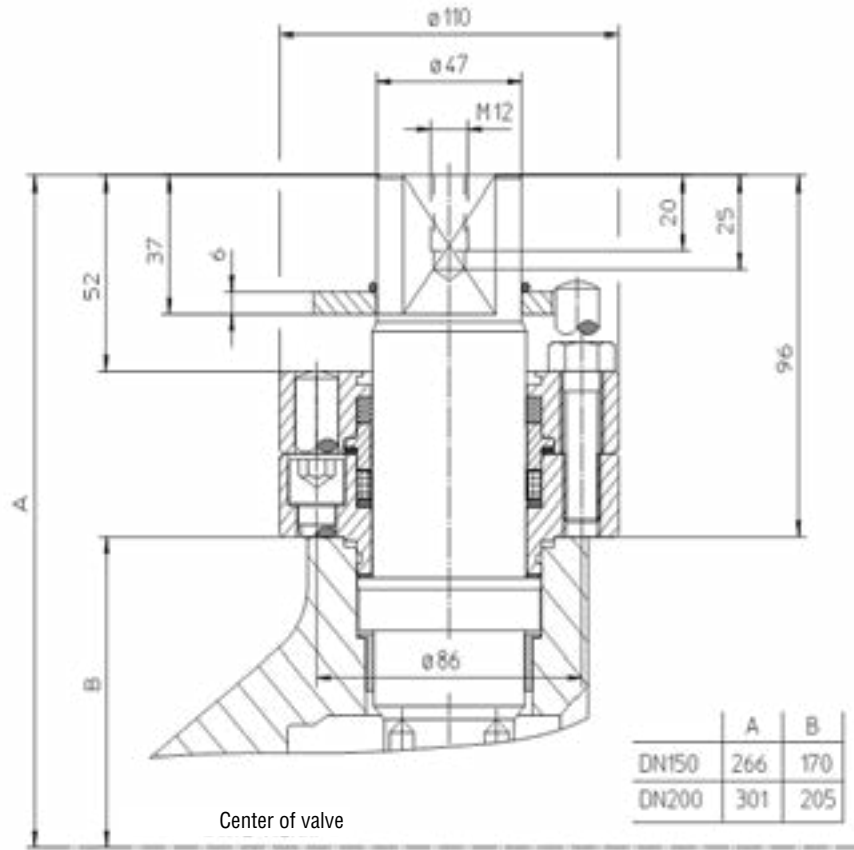


FK 76M DN 150 + DN 200 DIN ISO "419"
 High temperature design:

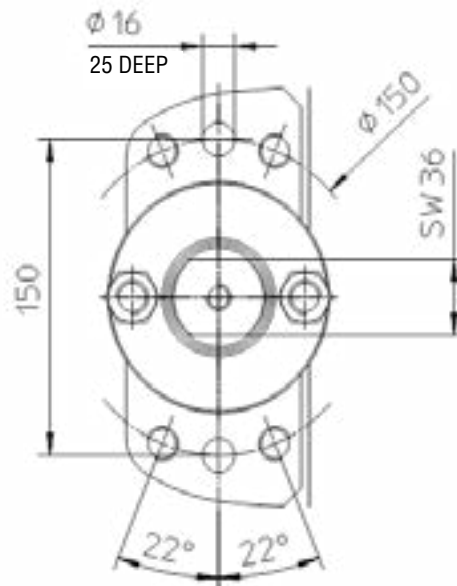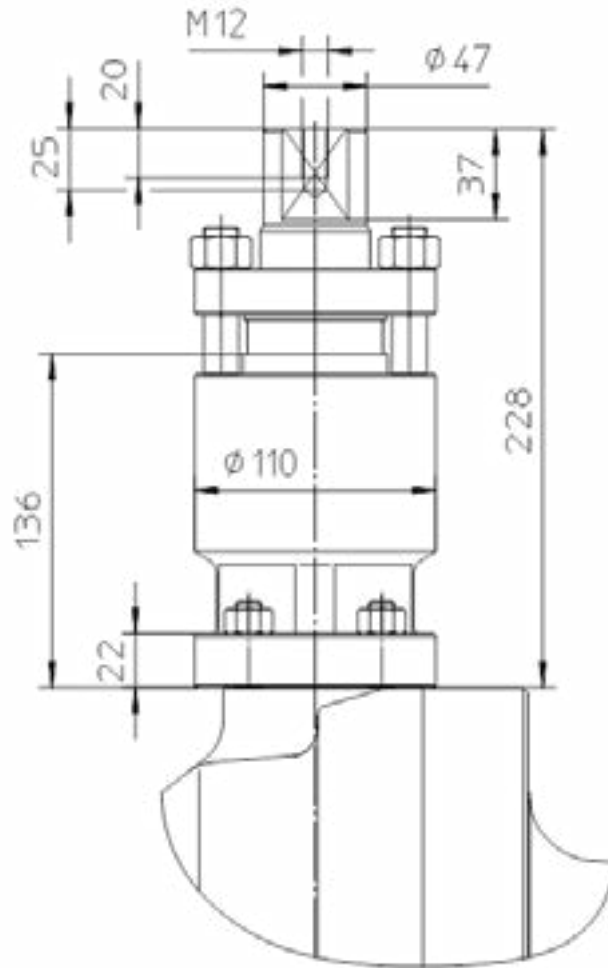


FK 76M DN 250 + DN 300 DIN ISO "419"

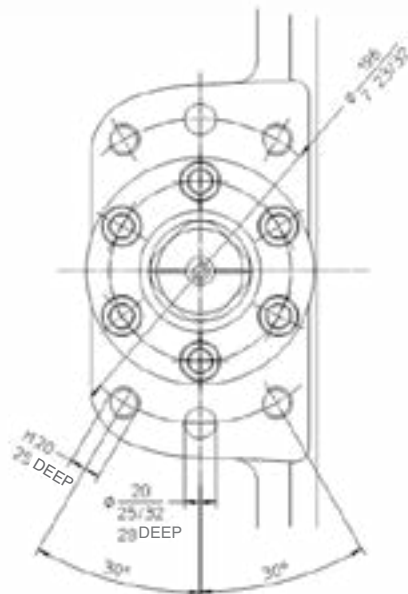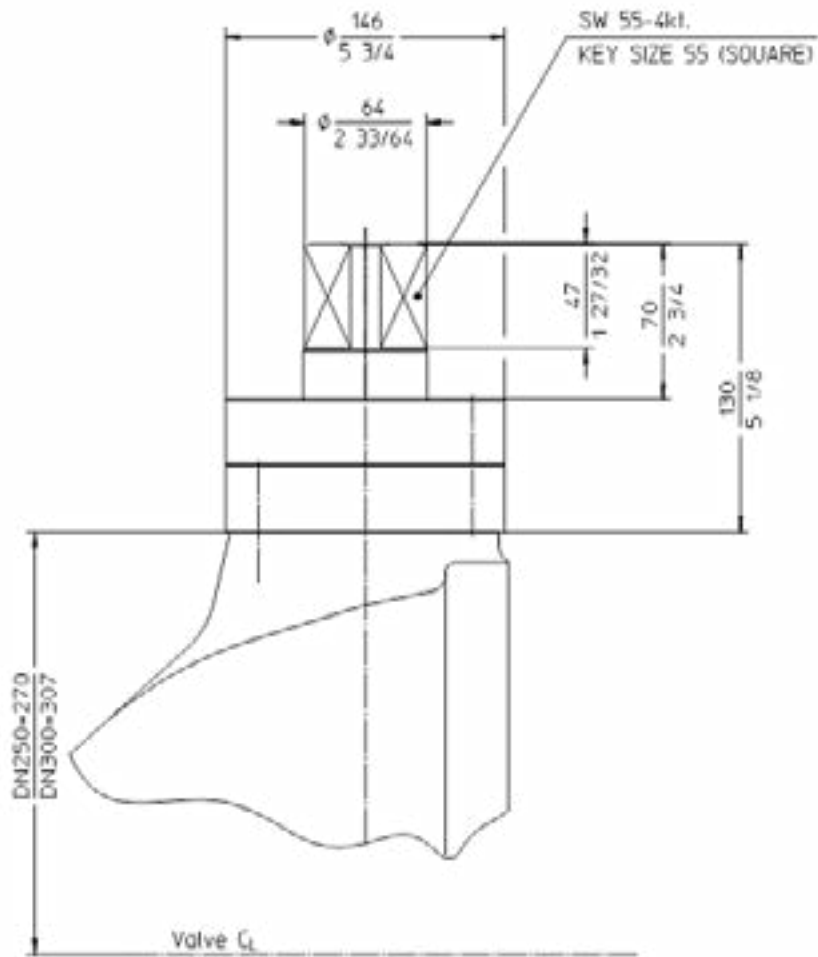


FK 76M DN 250-900 (3-pc design) Topwork ; "519"

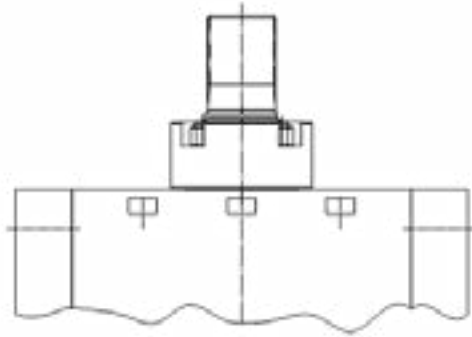



topview



**FK 76M DN 250 -900 (3-pc.- Design)
High temperature design**

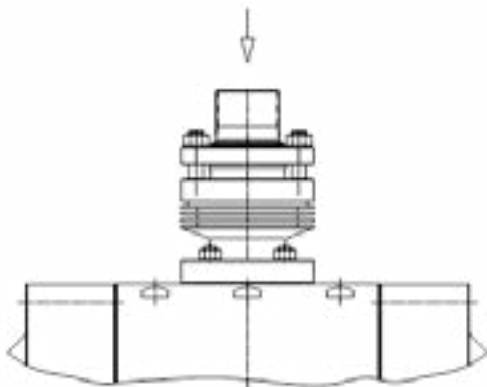

topview

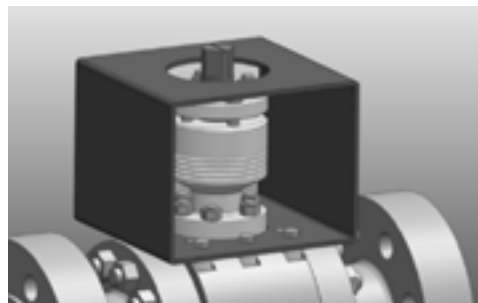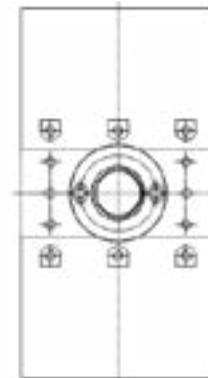

Dimension on request



Flowserve Flow Control GmbH
Rudolf-Plank-Straße 2
D-76275 Ettlingen
Germany,
T: +49 7243 103-0
F: +49 7243 103-222

FCD ARENTB0001 Printed in France 05/14

To find your local Flowserve representative

or for more information about Flowserve Corporation,
visit www.flowserve.com or call USA 1 800 225 6989

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can (and often does) provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Operation Maintenance (IOM) instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

© 2014 Flowserve Corporation, Irving, Texas, USA. Flowserve is a registered trademark of Flowserve Corporation.